

# Hardware Installation Guide


## How to link a Daisy Chain

Please follow below steps to connect the Duplicator Chain together.

### 1. Check Accessories:


5 items are necessary to setup the daisy chain. (as shown in below picture):

- 1). Controller,
- 2). A connecting cable,
- 3). A 35cm 3 head IDE cable,
- 4). A Master adapter card,
- 5). A Slave adapter card.

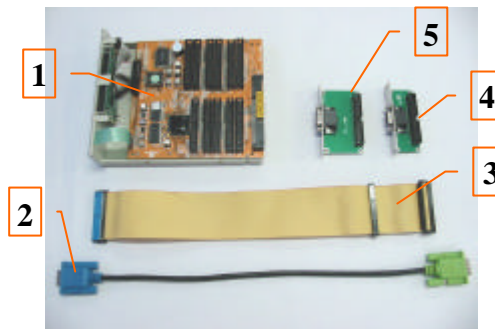


### 2. Connect Controller and Master/Slave adapters.

Please use 35cm 3head IDE cable to connect the controller and Master, Slave adapter cards as shown as below: Master Adapter is on upper level.

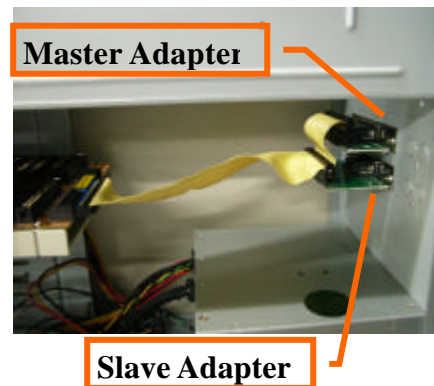

### 3. Link duplicators

When each duplicator were all well installed with controller, drives, and master/slave cards, then please connect each duplicator's Master port to its next duplicator's slave port. Please repeat this way to connect the daisy chain from the first tower to the last one.

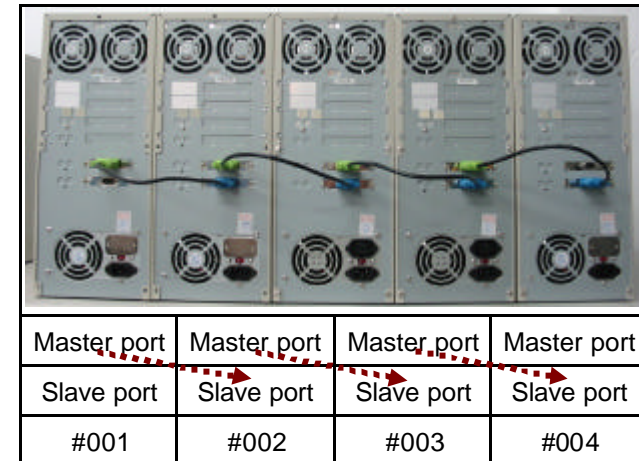

### 4. Set Link Position

- 4.1 When first time Turn on the Daisy Chain System, the system will prompt you to do "Link Position" Set up. There are total four positions for you to choose. "First", "Middle", "Last", and "Standalone". Based on the sequence which you link duplicators, the first duplicator is defined as the "First Tower". The last duplicator is "Last Tower". Rest of duplicators between the "First" and the "Last" were set as "Middle".
- 4.2 The "First" duplicator is the control tower. It means whatever function shown on the first duplication will also shown on the other duplicators. You only need to control and set functions of Daisy Chain on this control tower.

#### Note:

1. Every time when you add or reduce the number of duplicators or change the linking sequence in the Daisy Chain, Please follow above item 4 (Set Link Position) to reset the position.